

Bain marie



Technical features

Front drain tap with ball tap. Stainless steel tank.

Gastronorm basin capacity h 150mm, 1/2+1/3 for E/GBM46, 1/1+1/4+1/4 for E/GBM66


Gas Heating: stainless steel burner with self-stabilised flame. Thermostatic adjustment of temperature with safety valve and thermocouple. Automatic lighting with pilot burner and piezoelectric device

Electric Heating: stainless steel resistors. Thermostatic adjustment of temperature with warning light for control of functioning and temperature




	DIMENSIONS	PAN DIMENSIONS	POWER		WEIGHT
	W x D x H cm	W x D x H cm	GAS kW	ELECTRIC kW	kg
GAS					
GBM46	40 x 60 x 27/46	30,5 x 42,5 x 17,5	2,1		22
GBM66	60 x 60 x 27/46	51 x 47 x 17,5	5		30
ELECTRIC					
EBM46	40 x 60 x 27/46	30,5 x 42,5 x 17,5		1,5	22
EBM66	60 x 60 x 27/46	51 x 47 x 17,5		3	30

INSTALLATION DIAGRAM




GBM46

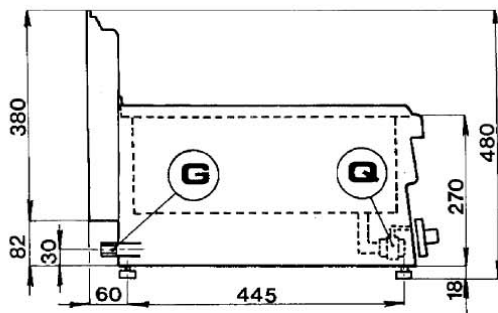


GBM66

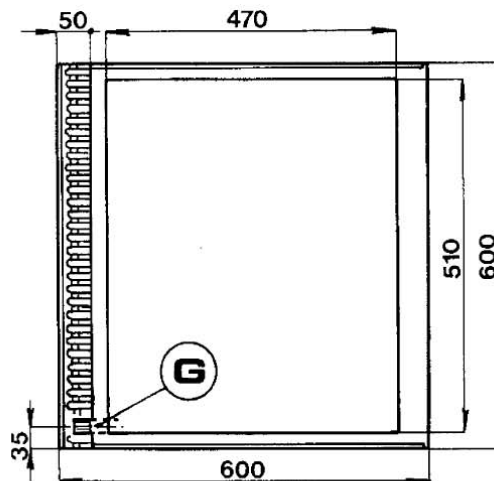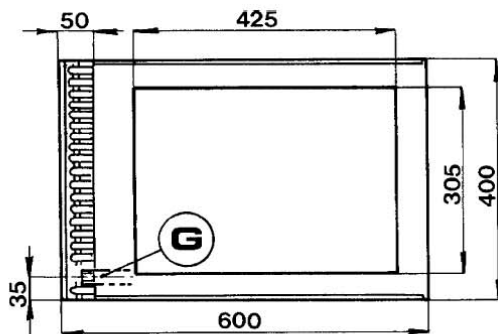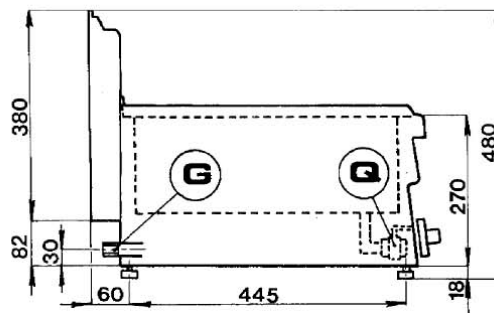

- G) Attacco gas G 1/2"
Gas Connection G 1/2"
Raccord gaz G 1/2"
Gasanschluß G 1/2"
Toma de gas G 1/2"
- Q) Rubinetto scarico vasca
Tub drain tap
Robinet de vidange du bac
Wannenauslaufhahn
Grifo de vaciado del recipiente

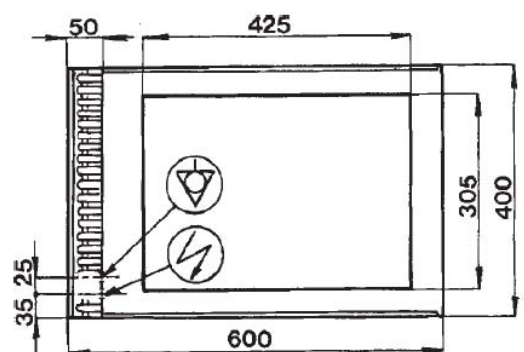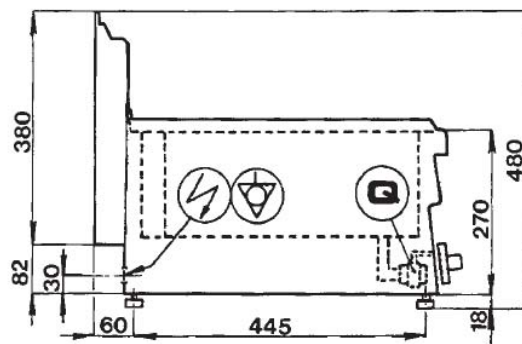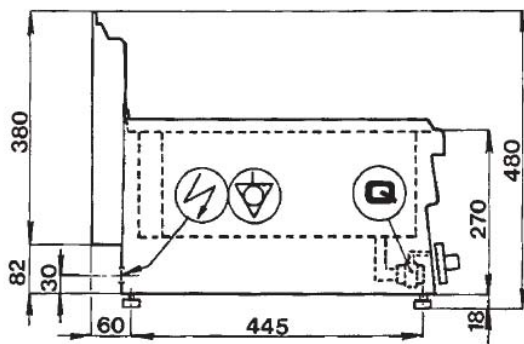

EBM46

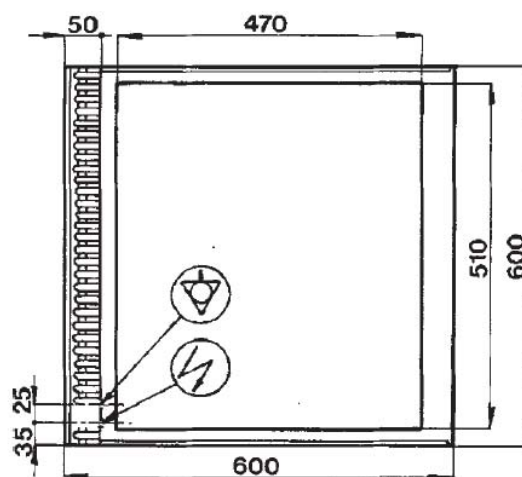

EBM66



Equipotenziale
Equipotential
Equipotentiel
Äquipotential
Equipotencial



Ingresso cavo d'alimentazione
Supply cable inlet
Entrée câble d'alimentation
Speisekabeleingang
Entrada cable de alimentación